



since 1971
the power to control

Fleischmann
unitro[®]
STÖRMELDESISTEME

EasyBind Rotary switch addressing LON-bus without Binding Software

Type designation:


Display modules

C3text:

clear text display for 320 messages

ME 24-P LED LON:

LED display for 24 messages

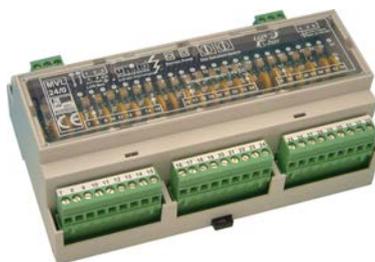

Input modules

MVL 24/0:

with 24 inputs, 24V AC/DC or 230V AC

Output modules (group messages C3text)

LM 0/16R:

16 relay outputs, 250V AC, 5A, 2-pin led out




Function

- Linking of LON bus components via EasyBind rotary switch addressing (2x DEZ-switch), with the C3text via the parameterization software
- Binding software (such as LonMaker) is not required
- Expansion of existing systems without "LON bus knowledge"
- 16 group messages (only C3text)) can be allocated as desired from up to 320 message inputs

Where applicable

- Decentralized messages should be easily visualized (LED display or plain text)

C3text EasyBind link via rotary switch addressing

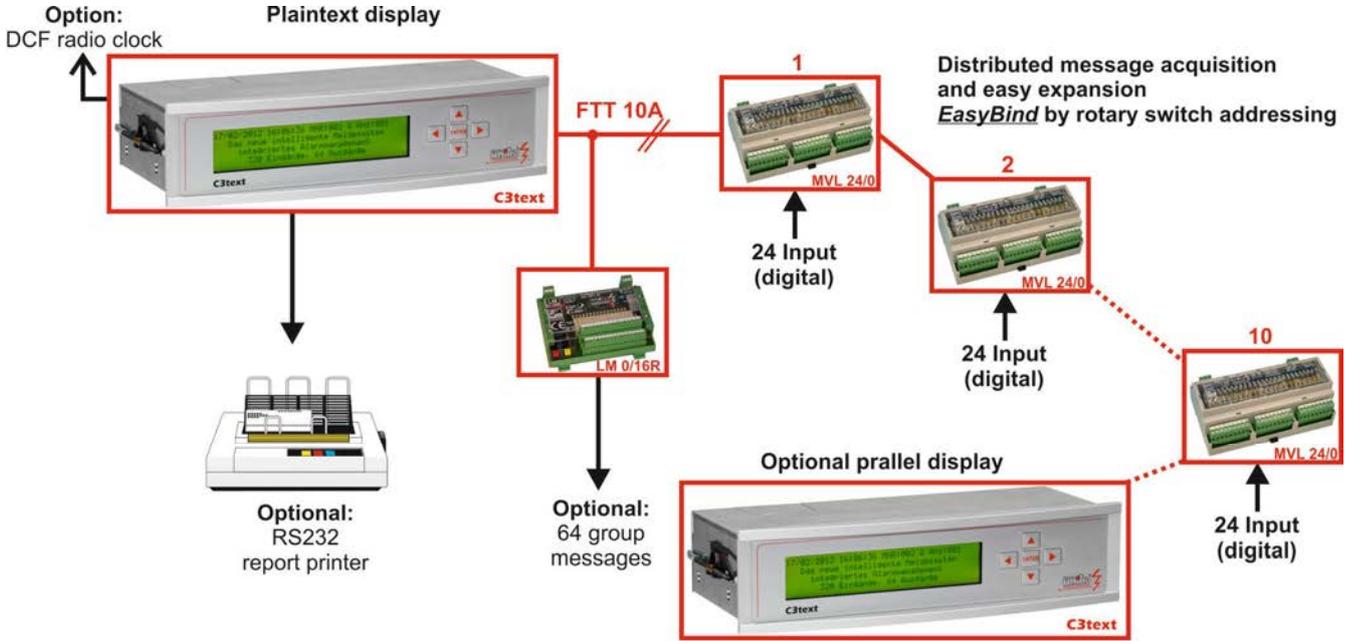

ME 24-P LED LON EasyBind link via rotary switch addressing

